




## INTRODUCTION

Temperature Indicators / Controllers play an important part in any process industry. Quick and accurate measurement / control of a process temperature will improve the final product quality, reliability and reduce rejection. Temperature indication and control is therefore one of the prime considerations in any process industry.

When the process is complex and critical, the measurement locations are many and they have inter-relationship between one another which needs to be recorded, analysed and stored. In such a situation Data Acquisition System becomes a necessity. The Intelligent series serves this purpose very effectively.

## PRINCIPLE OF OPERATION

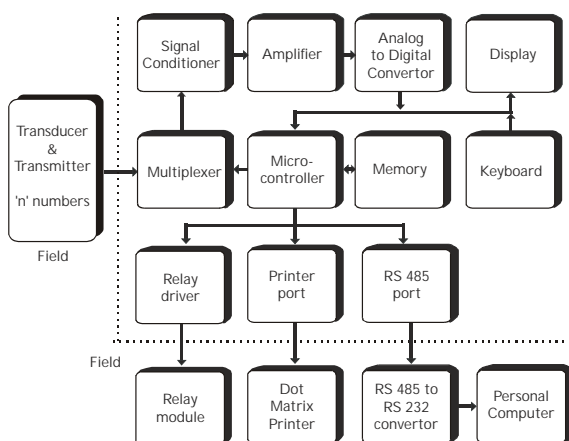

Data Acquisition System (DAS) series is based on microcontroller and is designed for fast and accurate measurement and control of temperature. The instrument is designed using highly reliable electronic components. This series accepts all types of Thermocouples, Pt - 100, 0 - 10 V DC as well as 4 - 20 mA as input. Wide ranges of measurements are available depending on the sensors used. The instrument is immune to mechanical vibrations. Even the mounting position will not affect the measurement's accuracy. The large bright red LED seven segment display allows long distance readability. Use of highly reliable electronic components with low temperature coefficient ensure long and trouble free service. The instrument is tested for its performance under various climatic conditions.



ESD's DAS offer communication to PC. The data from the instrument is logged on to the PC in a file. The data in these files can be opened in a spread sheet package like MS-Excel so as to obtain various graphs and carry out trend analysis.

## APPLICATION

The ESD iDAS series data acquisition system can be used in almost any industry, laboratory etc. where accurate temperature monitoring and process verification is needed to be carried out.

## FEATURES


- ✓ **Separate display for each Process Value!**
- ✓ Proven trouble free field performance
- ✓ Highly compact and better accuracy
  - User friendly PC end software with Graphs and Reports for better analysis
- ✓ User friendly programming
- ✓ USB interface for unlimited data storage
  - Dust and vermin proof enclosure with epoxy powder coating
- ✓ LED display gives better readability at long range
- ✓ Fast response time
- ✓ Available in different DIN std. cutouts
- ✓ Designed for Pt-100, Thermocouples and 4 - 20 mA input
- ✓ Fail safe relay logic
- ✓ Maximum MTBF and minimum MTTR
- ✓ Feather touch push button

## SPECIFICATIONS


Model	: iDAS-8u	Display response time	: 8 seconds for each reading update
Number of inputs	: 8	Real time clock	: Built in (24 hours format)
Ranges	: Refer chart below (other on demand)	Battery backup	: Built in for program / data memory
Input	: Pt-100 / Thermocouple / 4-20 mA	Interface	: USB 2.0 suitable for 8 Gb pendrive
Indication	: 999.9 12.5 mm RED LED display	Records capacity	: Unlimited
Number of digits	: 36 (32 digits for process value, 4 for each of the 8 channels, 4 for Real Time Hour)	Output	: CSV file editable in MS Excel
Indication accuracy	: +/- 0.25 % of full scale +/- 1 digit	Front facia	: ABS plastic suitable for IP 55 having size 192 x 96 mm
Least count	: Refer chart below (other on demand)	Panel cutout	: 186 x 92 mm
Power supply	: 230 V AC, +/- 10 %, 50 Hz with earth	Mounting	: Flush panel
Relative humidity	: Less than 90% non condensing	Enclosure	: Mild steel CRCA sheet with powder coating
Ambient temperature	: 0 to 55°C	Termination	: Screwed type suitable for 2.5 mm <sup>2</sup> wire
Amb. Temp. compensation	: Built in up to 55°C	Weight	: 1.5kg approximately
Accuracy deviation due to		Chart	
a) Temperature change	: +/- 0.002 % /°C, ref at 25°C		
b) Supply variation	: +/- 0.001 % / V		
Sensor break indication	: 0pn (for open)		
Input impedance	: < 10 Mohms, (only for T/C input )		
Recalibration (if reqd)	: By software using keypad. To be done on channel 1 only.		
Programming	: Using 4 keys membrane keypad. Default password is 134		
Power consumption	: 6 VA		
Channel skip	: By setting scan time as zero seconds		

Input	Std. Ranges in °C	Least count
Pt-100	-100 to 200 0 to 400	0.1°C
J	0 to 600	1°C
K	0 to 1200	
R, S	0 to 1600	
mA / mV	Programmable from -999 to 9999	Settable

## INSTALLATION



■ 145  
■ Depth including terminals

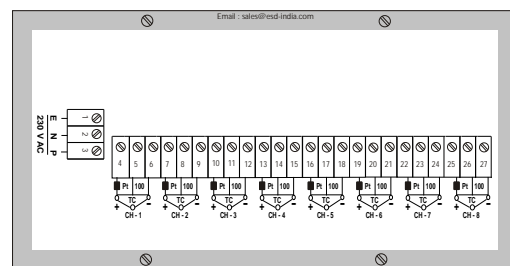

186

92

## ORDERING INFORMATION

IDAS-8u

X1	X2	X3	X4	X5
No. of Inputs 1 - Eight	Input 1 - Pt - 100 2 - J type T/C 3 - K type T/C 4 - R type T/C 5 - S type T/C 6 - 0 to 20 mA 7 - 4 to 20 mA 8 - 0 to 2V DC 9 - Other	Range 0 - -100 to 200°C 1 - 0 to 400°C 2 - 0 to 600°C 3 - 0 to 1200°C 4 - 0 to 1600°C 5 - Other	Power Supply 1 - 230 V AC 2 - 110 V AC 3 - 24 V AC 4 - 24 V DC 5 - Other	Type 1 - PC 2 - USB

Ordering eg. Intelligent 11 - 11112  
Data Acquisition System  
No of inputs - Eight (1)  
Input - Pt - 100 (1)  
Range - 0°C to 400°C (1)  
Power Supply - 230 V AC (1)  
Type - USB (2)

ALSO SELECT  
ESD ...

### BACK END

- ✓ Pt - 100
- ✓ Thermocouples
- ✓ Thermowells
- ✓ Compensating Cables

### SAME RANGE

- ✓ Scanners
- ✓ Scanners With Alarm
- ✓ Scanners With Controllers

### FRONT END

- ✓ Automation Panels
- ✓ PLC



**ELECTRONICS**  
SYSTEMS AND DEVICES  
Process Control Instrumentation

ESD HOUSE,  
55, Hadapsar Indl. Estate,  
Pune - 411013 (INDIA).

Phone : (020) 26819611 to 14

E-mail : sales@esd-india.com

Web : www.esd-india.com

